



bizhub c251i Color A3 multifunctional











Giving Shape to Ideas

CUSTOMER BENEFITS



Intuitive operability
Operate the bizhub like a
smartphone or tablet with fully
customized user interface



Mobile connectivity
Print anytime from anywhere
with Konica Minolta's innovative
mobile technologies



Security
Secure network integration,
data encryption,
SSD overwrite, and advanced
user authentication



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



ProductivityReliability, high-speed scanning and printing, combined with powerful finishing functions




Sustainability
Efficient printer fleet management, including automatic consumables delivery, pro-active maintenance and remote setup

OPTIONS

Antivirus LK-116

IP fax (T.38 fax)












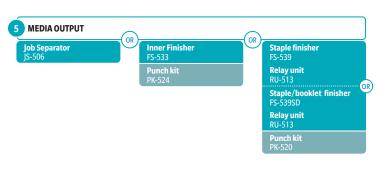



FINISHING FUNCTIONALITIES







Two-hole punching



Three-hole

punching

Duplex



mixmedia













Combined Half-fold mixplex/

Sheet insertion, report

Letter-fold

Booklet 0

Offset sorting

Banner printing

DESCRIPTIONS

ENHANCED FEATURES	
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX; XLSX and PDF/A
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LK-116 Antivirus	Bitdefender® Antivirus provides real time scanning
	of all input/output data
LK-117 IP fax (T.38 fax) (TBD)	Fax over IP networks (T.38), requires fax kit
CONNECTIVITY	
CONNECTIVITY FK-514 Fax board	Super G3 fax, digital fax functionality
	Super G3 fax, digital fax functionality Super G3 fax, digital fax functionality, lines 3 & 4 support
FK-514 Fax board	
FK-514 Fax board FK-515 Fax board	Super G3 fax, digital fax functionality, lines 3 & 4 support
FK-514 Fax board FK-515 Fax board MK-742	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515
FK-514 Fax board FK-515 Fax board MK-742 UK-221 Wireless LAN	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515 Wireless LAN and wireless LAN Access Point Mode
FK-514 Fax board FK-515 Fax board MK-742 UK-221 Wireless LAN EK-608 USB I/F kit	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515 Wireless LAN and wireless LAN Access Point Mode USB keyboard connection
FK-514 Fax board FK-515 Fax board MK-742 UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515 Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth
FK-514 Fax board FK-515 Fax board MK-742 UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit IC-420 Fiery controller	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515 Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth Professional color print controller
FK-514 Fax board FK-515 Fax board MK-742 UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit IC-420 Fiery controller VI-516 Interface kit for IC-420	Super G3 fax, digital fax functionality, lines 3 & 4 support Installation kit for FK-515 Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth Professional color print controller Fiery controller interface card

DF-714 Document feeder	Dual scan automatic document feeder, capacity 100 originals
WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
SC-509 Security kit	Copy guard function (2 kits required for dual scan ADF)
KH-102 Keyboard holder	To place USB keyboard
External Keyboard	Keyboard for alpha numeric data entry
FS-P04 Off-line stapler	20-sheet off-line stapling
MEDIA INPUT	
PC-116 1 Universal tray	500 sheets, 5.5" x 8.5" – 11" x 17" / 52–256 g/m²
PC-116 2 Universal tray	2x 500 sheets, 5.5" x 8.5" – 11" x 17" / 52–256 g/m²
PC-216 2 Universal tray	$2x500$ sheets, $5.5"x8.5"$ to $11"x17"$, $52\text{-}256g/m^2$
PC-416 Large capacity tray	2,500 sheets, 8.5" x 11" / 52-256 g/m ²
PC-417 Large capacity tray	2,500 sheets, 8.5" x 11", 52-256 g/m ²
LU-302 Large capacity tray	3,000 sheets, 8.5" x 11" / 52-256 g/m ²
MK-730 Banner tray	Multipage banner feeding
DK-516 Copier desk	Provides storage space for print media and other materials
MEDIA OUTPUT	
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit for FS-533	2/3 hole punching, autoswitching
FS-539 Staple finisher	50-sheet stapling, 3,200 sheets max. output
FS-539SD Booklet finisher	50-sheet staple finisher; 20-sheet booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-536(SD)	2/3 hole punching; autoswitching
RU-513 Relay unit	For FS-539/SD installation,
	(Max. 100 sheets output capacity)
JS-506 Job separator	Separation of fax output; etc.

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

Panel size/resolution	10.1" / 1024 x 600
System memory (standard/max)	8 GB
Solid State Drive	256 GB (standard)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP;
	HTTP(S); AppleTalk; Bonjour
Automatic document feeder (optional)	Up to 100 originals; A6-A3; 35-163 gsm;
	RADF or Dual scan ADF available
Paper input capacity (standard/max)	1,150 sheets / 6,650 sheets
Paper tray input (standard)	1x 500 sheets; 3.5" x 8.5" to 11" x 17"; custom sizes; 52–256 gsm
	1x 500 sheets; 5.5" x 8.5" to 12" x 18"; custom sizes; 52–256 gsm
Paper tray input (optional)	2x 500 sheets; 5.5" x 8.5" to 11" x 17"; 52–256 gsm
	1x 2,500 sheets; 8.5" x 11"; custom sizes; 52–256 gsm
Large capacity tray (optional)	1x 3,000 sheets; 8.5" x 11"; custom sizes; 52–256 gsm
Manual bypass	150 sheets; 3.5" x 8.5" to 12" x 18"; Custom sizes; Banner;
	60-300 gsm
Automatic duplexing	5.5" x 8.5" to 12" x 18"; 52–256 gsm
Finishing modes (optional)	Offset; Group; Sort; Staple; Punch; Half-fold; Letter-fold; Booklet
Output capacity (standard)	Max. 250 sheets
Output Capacity (optional)	Max. 3,300 sheets
Stapling	Max. 50 sheets or 48 sheets + 2 cover sheets (up to 209 gsm)
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 30 sheets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 209 gsm)
Booklet output capacity	Max. 100 booklets; unlimited (without tray)
Copy/print volume (monthly)	Max. ¹ 130,000 pages
Toner lifetime	Black up to 28,000 pages
	CMY up to 28,000 pages

Imaging unit lifetime	Black up to 225,000/1,000,000 pages (drum/developer)
	CMY up to 105,000/1,000,000 pages (drum/developer)
Power consumption	110–120 V / 50/60 Hz; Less than 1.50 kW
System dimension (W x D x H)	24.2" x 27" x 31" (without options)
System weight	Approx. 187 lbs. (without options)

PRINTER SPECIFICATIONS (STANDARD)

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Print Speed letter (mono/color)	Up to 25/25 ppm
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating System	Windows 10 (32/64); Windows 11; Windows Server 2012; Windows
	Server 2012 R2; Windows Server 2016; Windows Server 2019;
	Windows Server 2022; macOS 10.14 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android);
	Konica Minolta Mobile Print (iOS/Android/Windows 10 Mobile);
	Mobile Authentication and Pairing (iOS/Android)
	Optional: Google Cloud Print; WiFi Direct

PRINTER SPECIFICATIONS (OPTIONAL)

Print controller	Embedded Fiery IC-420
Controller CPU	AMD GX-424CC @ 2.4 GHz
Memory/HDD	2 GB / 500 GB
Page description language	Adobe PostScript 3 (CPSI 3020); PCL 6; PCL 5c

bizhub C251i Datasheet

SCANNER SPECIFICATION
Scan speed (mono/color)

Scan speed (mono/color)	Up to 100/100 ipm in simplex
	Up to 200/200 ipm in duplex
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF;
	XPS; Compact XPS; PPTX
	Optional: Searchable PDF; PDF/A 1a and 1b;
	Searchable DOCX/PPTX/XLSX
Scan destinations	2,100 (single + group); LDAP support

COPIER SPECIFICATIONS

0011211012011101110110	50. IEV 0. E0. IO. II. 0. II.	
Imaging technology	Laser	
Toner technology	Simitri® HD polymerized toner	
Copy/print speed letter (mono/color)	Up to 25/25 ppm	
Copy/print speed 11x17 (mono/color)	Up to 12/12 ppm	
1st copy out time letter	5.2/6.9 sec.	
Warm-up time	Approx. 12 sec. in mono; 13 sec. in color ²	
Copy resolution	600 x 600 dpi	
Gradation	256 gradations	
Multicopy	1-9,999	
Original format	3.5" x 8.5" to 11" x 17"; Custom sizes	
Magnification	25–400% in 0.1% steps; Auto-zooming	

Fax standard	Super G3 (optional)	
Fax transmission	Analog; i-Fax; Color i-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	
Fax destinations	2,100 (single + group)	

USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security Functions (standard)	ISO 15408 HCD-PP Common Criteria (in evalutation); IP filtering
	and port blocking; SSL2; SSL3 and TLS1.0/1.1/1.2/1.3 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	Overwrite all data function; SSD Self-Encryption (AES 256)/
	Storage lock password; Memory data auto deletion; Confidential
	fax receipt; Print user data encryption
Security Functions (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting (standard)	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition
Accounting Functions (optional)	ID card authentication (ID card reader);
	Authentication by mobile device (Android/iOS)
Software	Net Care Device Manager; Data Administrator; Web Connection;
	Log Management Utility

 $^{^1\,}Maximum\,monthly\,copy/print\,volume\,supported\,under\,standard\,vendor\,supplied\,service.\,Defines$ the upper end of the expected customer volume for the device. Customers should consider multiple machines if average monthly volume approaches duty cycle on a continual basis.

- All specifications refer to letter-size paper of 80 gsm weight.
- The support and availability of the listed specifications and functionalities varies depending on operating
- systems, applications and network protocols as well as network and system configurations.

 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of letter). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

 – Some of the product illustrations contain optional accessories.
- $\,\,$ $\,$ Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

 - Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



YOUR OFFICE TECHNOLOGY EXPERTS

(631) 873 - 4560 info@drpsolutions.com www.drpsolutions.com 18 Commerce Drive, Suite 1 Hauppauge, NY 11788

























² Warm-up time may vary depending on the operating environment and usage.